


Vertical or horizontal mounting

Technical data


Item	Oil flow	Capacity	Weight	Voltage	Frequency	Current absorption	Ø Fan	Air flow	Noise level	Rpm
	[l/min]	[l]	[kg]	[V]	[Hz]	[A]	[mm]	[m³/h]	[dB(A)]	
HY235.1-05A	70-280	20,2	89				630	5232	81	1000
HY235.1-05A	70-280	20,2	89				630	17500	105	3000

Performance

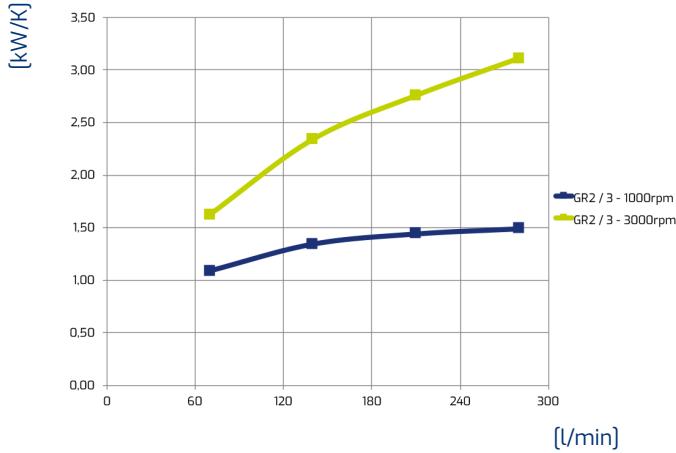

OIL T 80°C
T Amb. 40°C
1 kW = 860 Kcal/h - 1 HP = 0,75 kW

Pressure drop

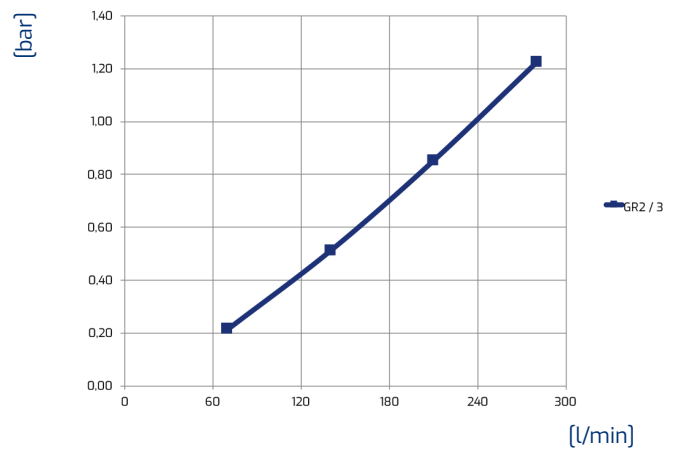

ISO VG 32 at 40°C

Viscosity - ISO VG 32 Oil

Oil	22	32	46	68	150
Correction factor	0,8	1	1,2	1,6	3

Technical data are not binding - The graphs show the central range of heat exchange data