



60001-4



60002-4




60003-4



60004-4


## SPARE PARTS FOR SERIE 60000

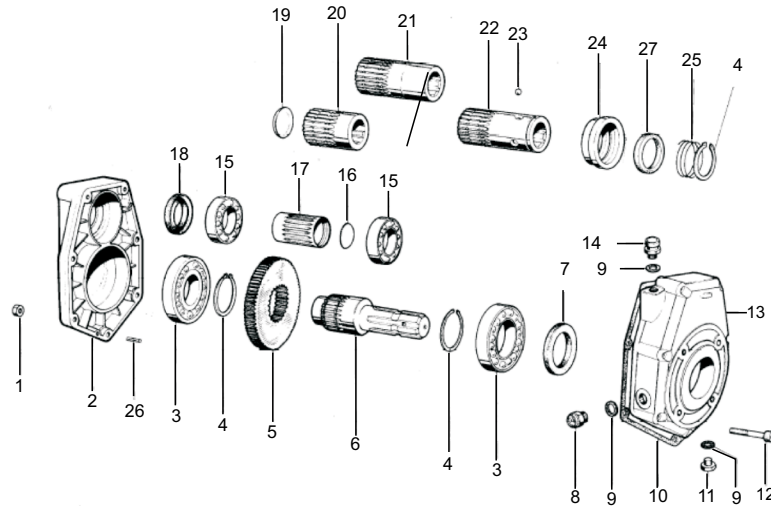

| No | Description              | Quantity |
|----|--------------------------|----------|
| 1  | Nut M6                   | 8        |
| 2  | Cover                    | 1        |
| 3  | Bearing type 6010        | 2        |
| 4  | Φ Snap Ring 50           | 3        |
| 5  | Ring Gear                | 1        |
| 6  | Male P.T.O. Shaft 1" 3/8 | 1        |
| 7  | Φ Sealing Ring 50x65x8   | 1        |
| 8  | Oil Level Plug 3/8"      | 1        |
| 9  | Gasket                   | 3        |
| 10 | Gasket                   | 1        |
| 11 | Oil Drain Plug 3/8"      | 1        |
| 12 | Socket Capscrew M6x50    | 8        |
| 13 | Housing                  | 1        |

|    |                                  |   |
|----|----------------------------------|---|
| 14 | Oil Breather Plug 3/8"           | 1 |
| 15 | Bearing Type 6007                | 2 |
| 16 | Φ Cap DIN 470 27                 | 1 |
| 17 | Pinion Gear                      | 1 |
| 18 | Φ Sealing Ring 35x52x7           | 1 |
| 19 | Φ Cap DIN 470 40                 | 1 |
| 20 | Female P.T.O Shaft 1" 3/8 Short  | 1 |
| 21 | Female P.T.O Shaft 1" 3/8 Long   | 1 |
| 22 | Female P.T.O Shaft Quick Fitting | 1 |
| 23 | Ball                             | 3 |
| 24 | Spring Ring                      | 1 |
| 25 | Spring                           | 1 |
| 26 | Peg 5x16                         | 2 |
| 27 | Ring                             | 1 |

## TECHNICAL INFORMATION

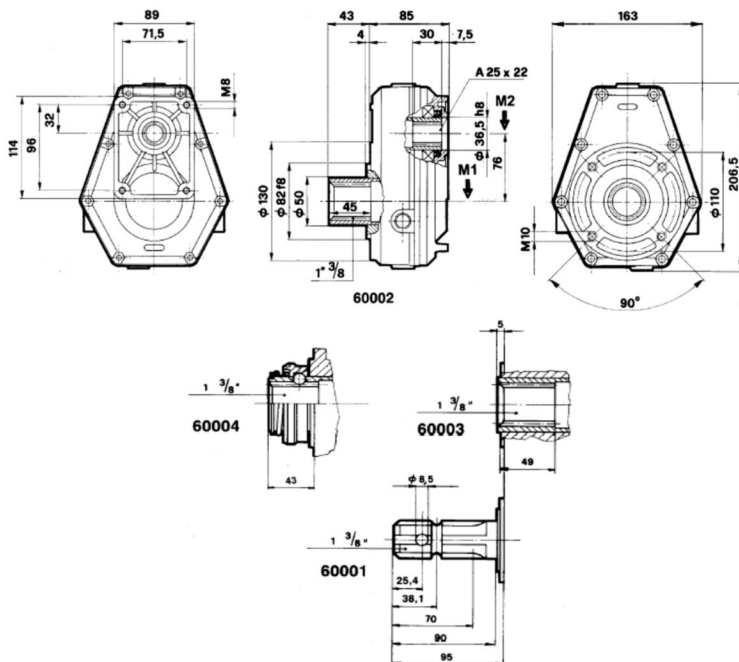

| Moment/M1<br>daNm | Moment/M2<br>daNm | Speed/N1<br>rpm | Speed/N2<br>rpm | N2/N1 | Power<br>kW | Weight<br>kg |
|-------------------|-------------------|-----------------|-----------------|-------|-------------|--------------|
| 17.8              | 11.9              | 540             | 810             | 1.5   | 10          | 5.5          |
| 15.2              | 7.6               | 540             | 1080            | 2     | 10          | 5.5          |
| 16.5              | 6.6               | 540             | 1350            | 2.5   | 10          | 5.5          |
| 18                | 5.5               | 540             | 1680            | 3     | 10          | 5.5          |
| 18.6              | 5.8               | 540             | 1836            | 3.5   | 10          | 5.5          |
| 15.9              | 4.2               | 540             | 2052            | 3.8   | 10          | 5.5          |

\*Max. Oil Level: 0.22 lt